


USG DONN® BRAND DXI® IDENTITEE® ACOUSTICAL SUSPENSION SYSTEM




VISIT USGME.COM TO ORDER SAMPLES


GRID COLORS

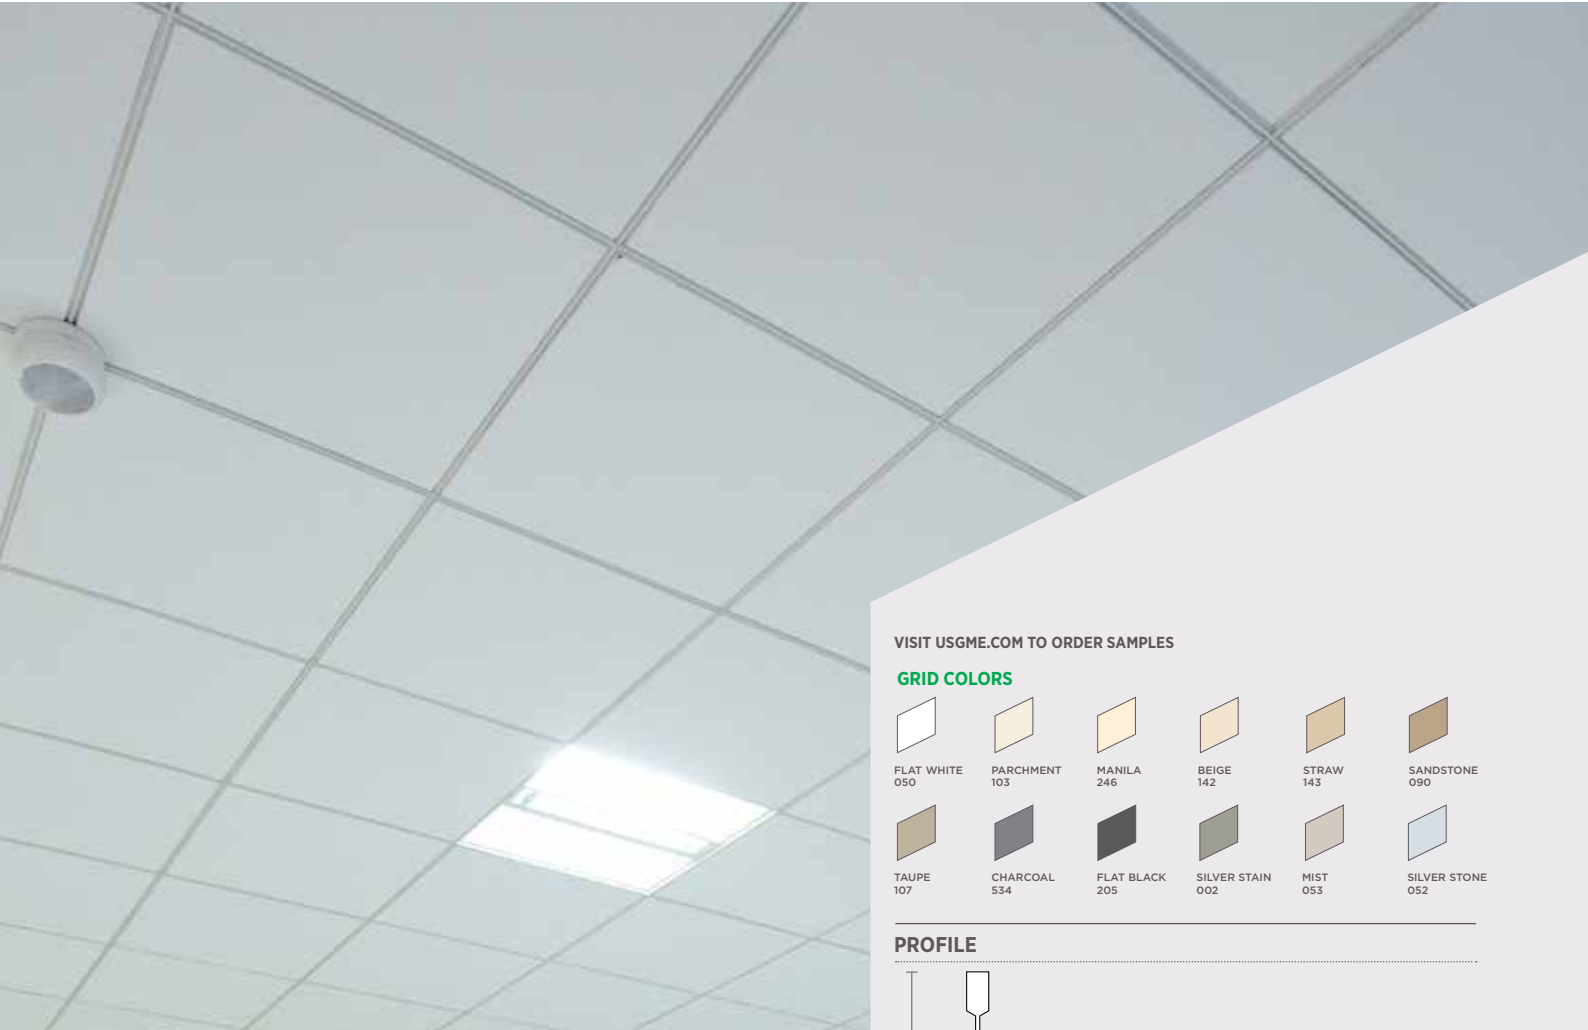


PROFILE



EDGE DETAIL



FINELINE BEVELED - FLB



FINELINE - FL

FEATURES AND BENEFITS

- Narrow-profile grid system with double 3.175mm reveal.
- Seamless reveal at intersections.
- Meets or exceeds all national code requirements including seismic.
- Compatible with USG Logix™ Integrated System.
- Custom colors available.
- ICC-ES evaluated for seismic installations (ESR-1222).
- G30 hot-dipped galvanized steel body and cap inhibits red rust.
- All USG Donn® Brand Identitee® DXI™ items have High Recycled Content (HRC).
- Available in metric and imperial sizes.
- Proprietary cap lance allows a variety of color and coating options to meet unique project requirements.

APPLICATIONS


- All interior general-use areas
- USG Logix™ Integrated System

USG DONN® BRAND DXI® IDENTITEE® ACOUSTICAL SUSPENSION SYSTEM


PRODUCT INFORMATION

Nr	Description	Item Reference	Load (1220MM Spacing)	Profile Height	Component Length
1	Main Runner	DXI26HRC	78KG/M ²	46MM	3600/3660MM
2	Long Cross Tee	DXI424HRC	78KG/M ²	46MM	1200/1220MM
3	Short Cross Tee	DXI224HRC	78KG/M ²	46MM	600/610MM
4	Wall Angle	802MT3600	78KG/M ²	22MM	3600MM
5	Wall Angle Shadowline	802MS3600 - 802MS164L		19/9MM - 20/20MM	3600MM
6	U-Trim	UT123525 - UT124825 - UT125325		25.4/12.7MM	3000MM

Main Runner DXI26HRC




Long Cross Tee DXI424HRC

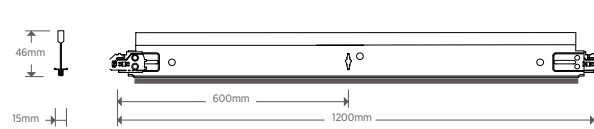


Short Cross Tee DXI224HRC



Wall Angle

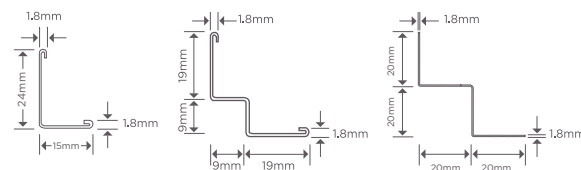

U-Trim



SUSPENSION OPTIONS



Adjustable Hanger

Suspension Wire

Angle Section

PHYSICAL DATA

Notice:

As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to usgme.com for the updated products information document.

Material

Min. G30 hot-dipped galvanized steel body and cap. Baked-on polyester paint.

Installation

Install according to ASTM C636, ASTM E580 and USG requirements.

Limitations

- Please refer to USG Donn® Brand AX™ or ZXLA™ for exposed suspension systems in non-fire-rated, high-humidity applications.
- Interior applications only.

Optional accessories

- Face Sleeve Seismic expansion joints.
- Intersection Sleeve for off-module intersection.

©2021 Factory of USG Middle East LTD. Co. All rights reserved.

USG BORAL
INNOVATION INSPIRED BY YOU.