


USG BORAL CURVED TRACK

DIMENSIONS

U-Shape Size 64, 75, 92 and 100 mm

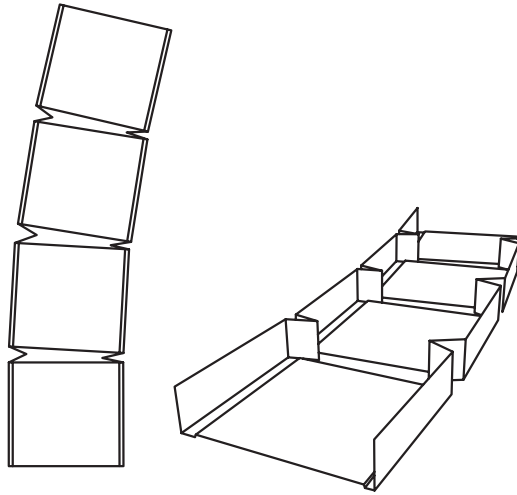

PRODUCT SPECS

Used in framing applications for constructing Curved Walls & Ceiling Domes
 Length: 3,000 mm standard
 Web depth: 64, 75, 92 and 100 mm
 Flange: 30 / 30 mm Thickness: 0.55 / 0.60 mm

RAW MATERIALS

- Galvanized steel G90

STEEL GRADE

Yield stress, Fy 33 ksi Ultimate

ASTM & CODE STANDARDS

- Curved Tracks are produced to meet or exceed ASTM C645 and C955
- Galvanized sheet steel meets or exceeds requirements of ASTM A-653
- For installation & storage information refer to ASTM C1007 & C754

GREEN BENEFITS

LEED Credit MR 2 - USG products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.

LEED Credit MR 4 - USG's steel products have a minimum of 25.5% postconsumer recycled content, and 6.8% pre-consumer.