


# USG ME BRAND QUADRA T24 SAFE CEILING CARRIER

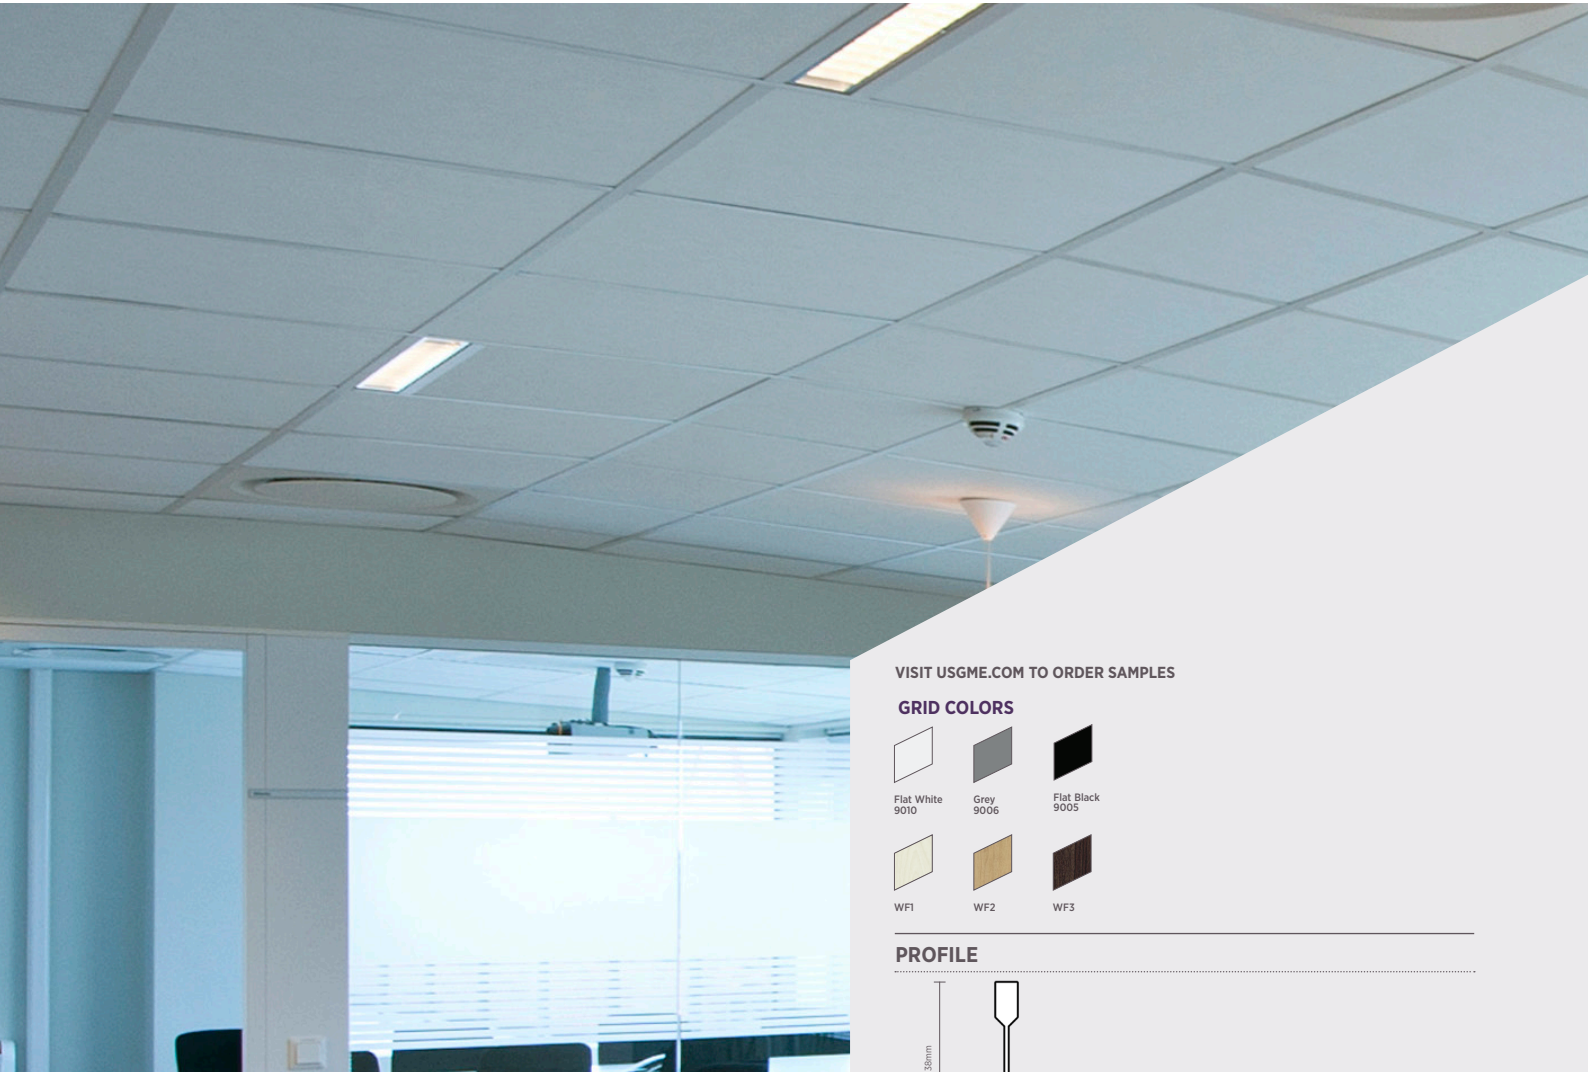

## FEATURES AND BENEFITS


- USG ME Brand QUADRA T24 Safe Ceiling Carrier features a body and cap made of G30 hot-dip galvanized steel as per EN 10346/ ASTM A653 with pre-painted 24mm width capping to ensure that the cap remains clean and rust-free.
- Four-step coating process that outperforms in paint adhesion and corrosion resistance, as proven by industry-standard salt spray tests conducted by an Independent laboratory.
- Safe, fast and simple to install & easily accessible.
- Maximum economy and design simplicity.
- Cross-tees with override-ends resist twisting and give professionally finished look with no exposed steel edges.
- Compatible with Square, SLT ceiling tile edges.
- Exceeds load compliance specifications as per ASTM C 635.
- Tees are stitched on the web for additional load bearing capacity.
- Available in metric and imperial sizes.

## APPLICATIONS


- Interior general-use areas

VISIT [USGME.COM](http://USGME.COM) TO ORDER SAMPLES


### GRID COLORS




### PROFILE



### EDGE DETAIL



SQUARE EDGE - SQ



SHADOWLINE TAPERED - SLT

## USG ME BRAND QUADRA T24 SAFE CEILING CARRIER




EN 13964 : 2014 + A1 : 2007


### PRODUCT INFORMATION

Description	Item Reference		Profile Height	Body Thickness	Component Length
	Metric	Imperial			
Main Runner	801Q3600H38	Q3660H38	38MM	0.3MM	3600/3660MM
Long Cross Tee	803Q1200H25	Q1220H25	24.5MM	0.28MM	1200/1220MM
Short Cross Tee	804Q600H25	Q610H25	24.5MM	0.28MM	600/610MM
Wall Angle	802MT3600		22MM	0.4MM	3600MM
Wall Angle Shadowline	802MS3600 - 802MS164L		19/9MM - 20/20MM	0.4MM	3600MM
U-Trim	UT123525 - UT124825 - UT125325		25.4/12.7MM	0.4MM	3000MM

#### Main Runner 801Q3600H38/Q3660H38




#### Long Cross Tee 803Q1200H25/Q1220H25




#### Short Cross Tee 804Q600H25/Q610H25




#### Wall Angle

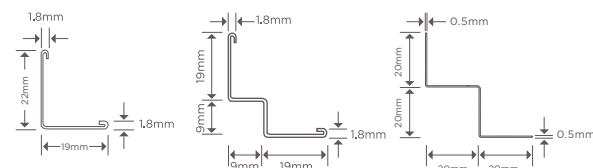

#### U-Trim



### SUSPENSION OPTIONS

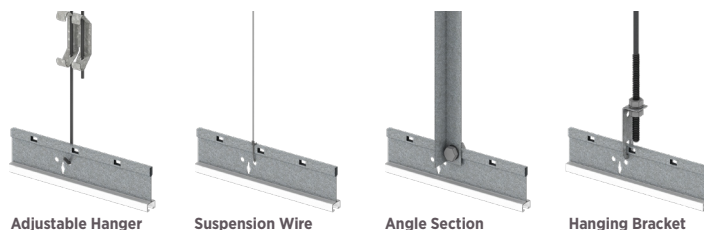

Adjustable Hanger

Suspension Wire

Angle Section

Hanging Bracket

### MAXIMUM ALLOWED OF TILES WEIGHT KG PER M<sup>2</sup>\*\*

DX QUADRA - T24 - Minimum Load - Carrying Capabilities of Main Runners				
Hanger distance (mm)	Applied Load (N)	Equivalent Uniform Load (N/M)	Allowable Midspan Deflection (mm)	Deflection Limit
900	61.71	202.3	0.339	L/360
1200	34.71	113.8	0.339	L/360
1500	27.77	91.0	0.339	L/360

\* The load per m<sup>2</sup> must be distributed uniformly (no point loads) over the ceiling area. After loading, the deflection of any grid component will remain within the maximum deflection per span.

Please consult USG ME for layouts, load or hanger distance.

#### Notice:

As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to [usgme.com](http://usgme.com) for the updated products information document.

©2021 Factory of USG Middle East LTD. Co. All rights reserved.