METAL FRAMING

DRYWALL FIXING BRACKET

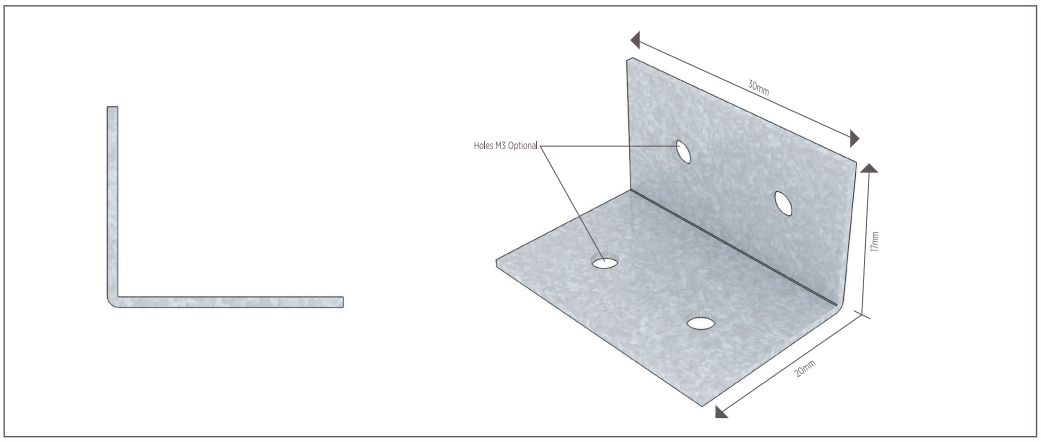

DESCRIPTION

Used in wall assemblies allowing for supporting a vertical load or providing lateral bracing CRC connections and floor joist hangers.

DIMENSIONS

Thickness Range: 0.9. 1.20 and 1.5mm
Dimension: 17 x 20 x 30mm

RAW MATERIALS

HDG Galvanized G40-G90 Zinc coating weight

STEEL GRADE

Yield stress, Fy 33 ksi Ultimate

ASTM & CODE STANDARDS

- USG Boral Fixing Bracket is produced to meet or exceed ASTM C645 and C955
- Galvanized sheet steel meets or exceeds requirements of ASTM A-653
- For installation & storage information refer to ASTM C1007 & C754

GREEN BENEFITS AND RECYCLED CONTENT

- LEED Credit MR 2 – USG products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.
- LEED Credit MR 4 – USG's steel products have a minimum of 25.5% postconsumer recycled content, and 6.8% pre-consumer.

REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or **USGme.com**

Notice:
As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to **usgme.com** for the updated products information document.

©2021 Factory of USG Middle East LTD. Co.
All rights reserved.

USG BORAL
INNOVATION INSPIRED BY YOU.™