


PAINTED

Gypsum Tile

VISIT USGME.COM TO ORDER SAMPLES

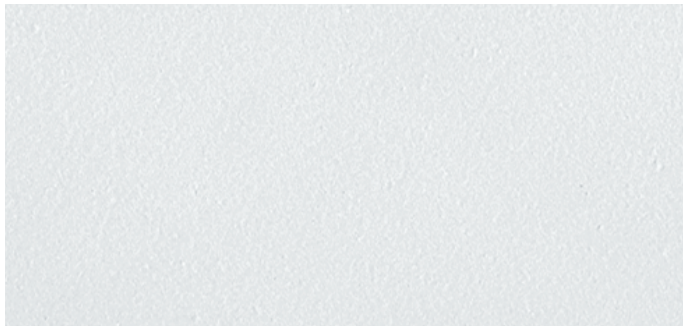

FEATURES & BENEFITS

- Painted Gypsum Ceiling with acrylic emulsion matte finish for a smooth and brighter surface.
- High humidity resistant; sag resistance ensures durability in standard or extreme environmental conditions. It can be installed during the early construction phase.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Washable, durable, scuff, and scratch resistant for longer life.
- High Light Reflectance (LR-0.81) reduces light fixtures & energy use.
- It is economical and easy to trim and install.
- Demountable and designed to be installed on the DONN® Brand ceiling suspensions.
- Available in a concealed edge design, specifically produced to elevate the overall space appearance.

APPLICATIONS

- Laboratories
- Commercial retails
- Restrooms and wet areas
- Department stores

SKYROCK®

PAINTED



PRODUCT CERTIFIED FOR ENVIRONMENTAL PRODUCT DECLARATION



TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	CAC	Light Reflectance	Anti-Mold & Mildew/Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ 	GT-BS6609	600*600*9.5	35	81%			4%	Low	\$
	GT-BS2209	610*610*9.5							
	GT-BS662	600*600*12.5	40	81%			4%	Low	\$\$
	GT-BS222	610*610*12.5							
	GT-BS622	600*1200*12.5	40	81%			4%	Low	\$\$
SL 	GT-BS242	610*1220*12.5							
	GT-BSR662	600*600*12.5	40	81%			4%	Low	\$\$
	GT-BSR222	610*610*12.5							
FL 	GT-BSR622	600*1200*12.5	40	81%			4%	Low	\$\$
	GT-BSR242	610*1220*12.5							
	GT-BSRF662	600*600*12.5	40	81%			4%	Low	\$\$
	GT-BSRF222	610*610*12.5							
Concealed 	GT-BSRF622	600*1200*12.5	40	81%			4%	Low	\$\$
	GT-BSRF242	610*1220*12.5							
	GT-BSDC662	600*600*12.5	40	81%			4%	Low	\$\$\$
	GT-BSDC622	600*1200*12.5							

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DX/DXL SL Edge	DXT FL Edge	DXF FL Edge	DX/DXL Concealed

SPECIFICATION DETAILS

Painted Gypsum Ceiling Tile meets specifications in accordance with ASTM E1264.

Materials Classification

Type: XX, Pattern: G

Substrate and Surface Finish

Gypsum ceiling panel finished with factory-applied water-based paint

Thickness

9.5mm, 12.5mm

Size

600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim

Square, Reveal [SL, FL], Concealed

Weight

9.5mm [6.17 kg/m²],

12.5mm [8.12 kg/m²]

Reveal and Concealed

12.5mm [10.6 kg/m²]

Ceiling Attenuation Class [CAC]

[35-40]

Mold Prevention

Resistant to mold growth. Panels are available upon request

Humidity Resistance

Maximum 95% RH / 40°C

Light Reflectance Coefficient [LR]

0.81

Color

Standard White

Surface Burning Characteristics per ASTM E 84

Class A

Thermal Resistance

12.5mm [R 0.45]

Formaldehyde Classification

Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486

Exceeds 1000 Wash/Scrub Cycles without surface break or the extent of abrasion

Notice: As we are involved in constant products development; this document information is subject to change without prior notice.

Please always refer to usgme.com for the updated products information document.

©2024 **Factory of USG Middle East LTD. Co.** All rights reserved.

Painted Gypsum Tile

Version #: 03 / Revision date: 1-June-2024 / Issue date: 22-December-2021 / Doc. Ref CT-TDS006-3

This technical datasheet is intended for global use in regions where USG ME has authorized sales territories.