

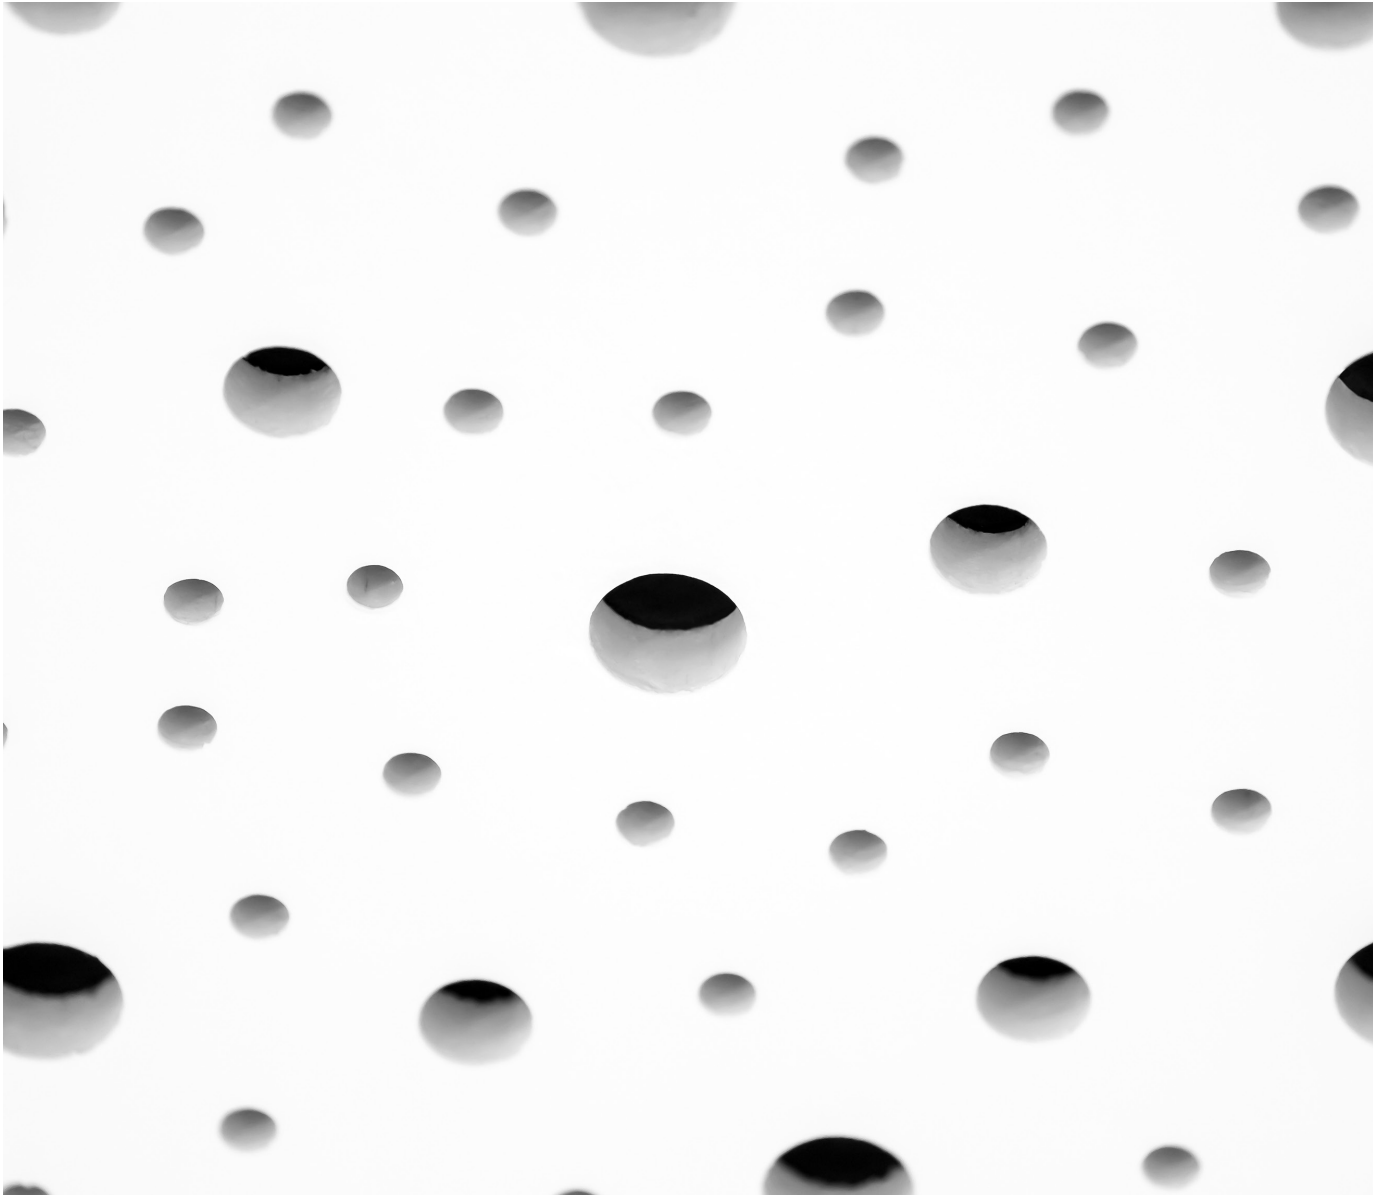


## SOUNDBLOCK - R8-15-20


Perforated Gypsum Tile




SQUARE

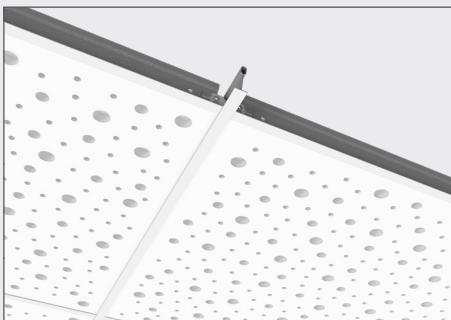

REVEAL

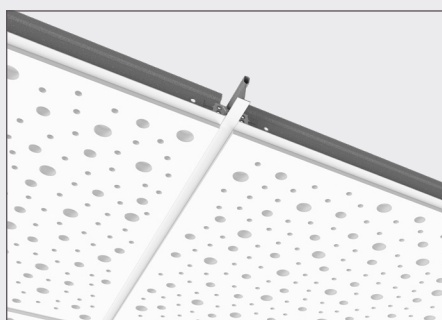

CONCEALED

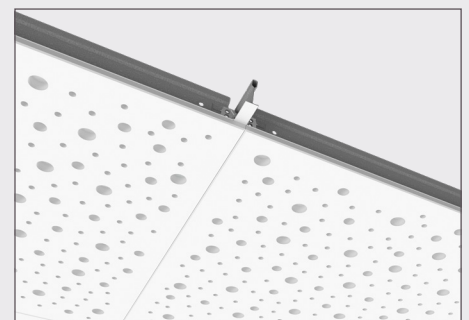

# SKYROCK®

## SOUNDBLOCK - R8-15-20



PRODUCT CERTIFIED FOR ENVIRONMENTAL PRODUCT DECLARATION



CEILING ATTENUATION CLASS



AVAILABLE IN CONCEALED EDGE

### FEATURES & BENEFITS

- Irregular round perforation Gypsum Ceiling tiles with acoustic back fleece for high acoustic performance up-to 0.80 NRC.
- Tiles come in a range of surface finishes, including laminated and painted options.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Offered in both metric and imperial sizes.
- Available in a concealed edge design as an option, adding a refined touch to the overall space.
- Resistant to humidity and sagging, they exhibit impressive durability even in challenging environmental conditions.
- Additionally, their scrub-resistant properties facilitate easy removal of dirt marks.
- Tiles are demountable and designed to be seamlessly integrated with DONN® Brand acoustical ceiling suspensions.

### APPLICATIONS

- Schools
- Commercial retails
- Department stores
- Hotels
- Malls and residential

### ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
R8-15-20	0.55	<b>0.80</b>	<b>0.70</b>	<b>0.75</b>	<b>0.70</b>	0.80	<b>0.70</b>
R8-15-20 with 19mm Soft Fiber Infill	0.70	<b>0.95</b>	<b>0.80</b>	<b>0.90</b>	<b>0.75</b>	0.65	<b>0.80</b>

\* Calculated to ASTM C 423-01

### TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ 	GT-PS6609-R8-15-20	600*600*9.5	0.70		81%			4%	Low	\$\$\$
	LGAE-PS6609-R8-15-20	600*600*9.5			84%					
	GT-PS662-R8-15-20	600*600*12.5	0.70		81%			4%	Low	\$\$\$\$
	GT-PS622-R8-15-20	600*1200*12.5								
	LGAE-PS662-R8-15-20	600*600*12.5	0.70		84%			4%	Low	\$\$\$\$
	LGAE-PS622-R8-15-20	600*1200*12.5								
SL 	GT-PSR662-R8-15-20	600*600*12.5	0.70		81%			4%	Low	\$\$\$\$
	GT-PSR622-R8-15-20	600*1200*12.5								
	LGAE-PSR662-R8-15-20	600*600*12.5	0.70		84%			4%	Low	\$\$\$\$
	LGAE-PSR622-R8-15-20	600*1200*12.5								
FL 	GT-PSRF662-R8-15-20	600*600*12.5	0.70		81%			4%	Low	\$\$\$\$
	GT-PSRF622-R8-15-20	600*1200*12.5								
	LGAE-PSRF662-R8-15-20	600*600*12.5	0.70		84%			4%	Low	\$\$\$\$
	LGAE-PSRF622-R8-15-20	600*1200*12.5								
Concealed 	GT-PSDC662-R8-15-20	600*600*12.5	0.70		81%			4%	Low	\$\$\$\$
	LGAE-PSDC662-R8-15-20	600*600*12.5			84%					
	GT-PSDC622-R8-15-20	600*1200*12.5	0.70		81%			4%	Low	\$\$\$\$
	LGAE-PSDC622-R8-15-20	600*1200*12.5			84%					

### GRID PROFILE OPTIONS

DX/DXL SQ Edge	DX/DXL SL Edge	DXT FL Edge	DXF FL Edge	DX/DXL Concealed

# SKYROCK®

## SOUNDBLOCK - R8-15-20



PRODUCT  
CERTIFIED  
FOR  
ENVIRONMENTAL  
PRODUCT  
DECLARATION



CEILING  
ATTENUATION  
CLASS



AVAILABLE  
IN CONCEALED  
EDGE

### SPECIFICATION DETAILS

Soundblock R8-15-20 Ceiling Tile meets specifications in accordance with ASTM E1264.

#### Materials Classification

Type: XX,  
Pattern: B, C

#### Substrate and Surface Finish

Laminated: Gypsum ceiling panel laminated with vinyl-faced  
Painted: Gypsum ceiling panel finished with factory-applied water-based paint

#### Thickness

9.5mm, 12.5mm

#### Size

600 x 600mm, 600 x 1200mm

#### Edge Detail Trim

Square, Reveal [SL, FL], Concealed

#### Open Area

600 x 600mm: 16.8%,  
600 x 1200mm: 16.2%

#### Weight

Square  
9.5mm [5.13 kg/m<sup>2</sup>],  
12.5mm [6.76 kg/m<sup>2</sup>]  
Reveal and Concealed  
12.5mm [7.8 kg/m<sup>2</sup>]

#### Noise Reduction Coefficient [NRC]

[0.70] [0.80]

#### Mold Prevention

Resistant to mold growth. Panels are available upon request

#### Humidity Resistance

Maximum 95% RH / 40°C

#### Light Reflectance Coefficient [LR]

Laminated: 0.84  
Painted: 0.81

#### Color

Laminated: Standard White  
Painted: Standard White

#### Thermal Resistance

12.5mm [ R 0.45]

#### Surface Burning Characteristics as per ASTM E84

Laminated: Class A  
Painted: Class A


#### Formaldehyde Classification

Class E1 as per EN717-1

#### Washability / Scrubbability as per ASTM D4828 & D2486

Exceeds 1000 Wash/Scrub Cycles without surface break or the extent of abrasion

### PRODUCT DATA



	600x600mm		600x1200mm	
Actual Length (mm)	594		Actual Length (mm)	1194
Actual Width (mm)	594		Actual Width (mm)	594
Hole Type	Round		Hole Type	Round
Hole Size (mm)	ø8, ø15, ø20		Hole Size (mm)	ø8, ø15, ø20
Border (mm)	27		Border (mm)	27
Pitch (mm)	N/A		Pitch (mm)	N/A
Holes layout (L x W)	N/A		Holes layout (L x W)	N/A
Number of Holes	R8: 321; R15: 117; R20: 72		Number of Holes	R8: 642, R15: 219, R20: 141
Perforation Rate (%)	16.8%		Perforation Rate (%)	16.2%

Additional patterns layouts are available upon request. Please contact USG ME nearest sales office.

**Notice:** As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to [usgme.com](http://usgme.com) for the updated products information document.  
©2024 Factory of USG Middle East LTD. Co. All rights reserved.