


CURVED TRACK

CTR30100-060

| Curved Track | Flange | Width | Thickness |
|--------------|--------|-------|-----------|
|--------------|--------|-------|-----------|

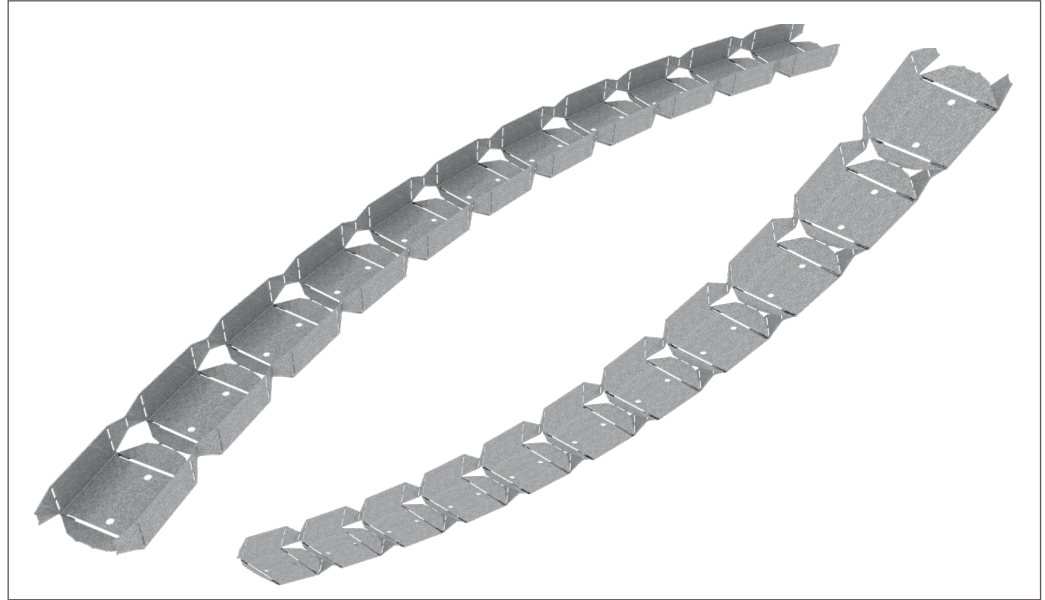

DESCRIPTION

- Used in special curved framing applications as the top and bottom channels for securing wall studs at floor and ceiling junctions.
- Used in framing application for constructing curved walls, ceilings domes and curved bulk head.
- Curve radius can be adjustable on site as per the project requirement.

PRODUCT DATA

Length: 3,000 mm standard
Width: 64, 75, 92 and 100 mm
Flange: 30 / 30 mm
Thickness: 0.45 to 0.6 mm

RAW MATERIALS

- Galvanized steel G40-G90

STEEL GRADE

Yield stress, Fy 33 ksi Ultimate

RAW MATERIALS

- Curved Tracks are produced to meet ASTM C645 and C955
- Galvanized sheet steel meets requirements of ASTM A-653
- For installation & storage information refer to ASTM C1007 & C754

GREEN BENEFITS

- LEED Credit MR 2 – USG products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.
- LEED Credit MR 4 – USG’s steel products have a minimum of 25.5% post-consumer recycled content, and 6.8% pre-consumer.

REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or **USGme.com**

Disclaimer:

Information contained in this document is subject to change without prior notice due to our ongoing product development. We recommend referring to the website **usgme.com** for the most up-to-date and accurate product information.

©2024 Factory of USG Middle East LTD. Co. All rights reserved.