


DEFLECTION CLIP



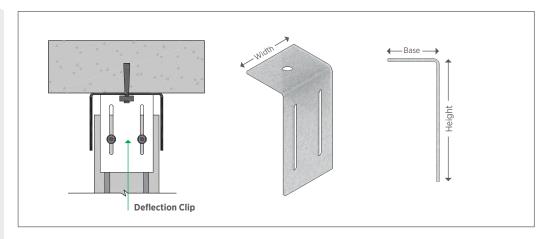

DESCRIPTION

Used in place or in combination with deflection track and allowing for vertical movement above wall partitions

PRODUCT CATEGORIES

• Deflection clip

Width x Height x Base - Thickness 50 x 125 x 65 mm - 3mm thick 60 x 125 x 50 mm - 3mm thick

RAW MATERIALS

- · Galvanized steel G90.
- HDG Steel in 3mm Base Material Thickness.

GREEN BENEFITS

- LEED Credit MR 2 USG products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.
- LEED Credit MR 4 USG's steel products have a minimum of 25.5% post-consumer recycled content, and 6.8% pre-consumer.

REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or USGme.com

Disclaimer:

Information contained in this document is subject to change without prior notice due to our ongoing product development. We recommend referring to the website usgme.com for the most up-to-date and accurate product information.

©2024 Factory of USG Middle East LTD. Co. All rights reserved.



