


# DEFLECTION SLOTTED TRACK U SHAPE

TRS50100-090

Slotted Track	Flange	Width	Thickness
---------------	--------	-------	-----------

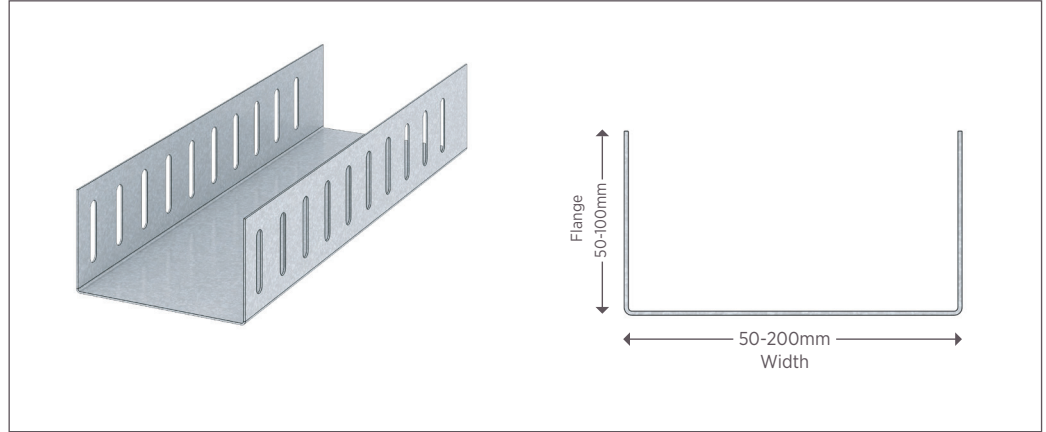

**DESCRIPTION**

- Used in wall assemblies allowing for vertical deflection of floor beams or floor decks above the interior partitions.
- Custom made flange width varying from 50 to 100mm suitable for vertical deflection movement exceeding 30 mm.
- Used for a wall height which above of 3.5m.

**DIMENSIONS**

**Flange:** 50mm-100mm  
**Width:** 50mm-200mm  
**Thickness:** 0.9mm  
**Perforations width:** 6mm  
**Distance between perforations:** 25.4mm

**MATERIALS**

HDG G90 Zinc coating

**STEEL GRADE**

Yield stress, Fy 33 ksi Ultimate

**ASTM & CODE STANDARDS**

- USG Deflection Slotted Track is produced to meet ASTM C645 and C955
- Galvanized sheet steel meets requirements of ASTM A-653
- For installation & storage information refer to ASTM C1007 & C754

**GREEN BENEFITS**

- LEED Credit MR 2 – USG products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.
- LEED Credit MR 4 – USG’s steel products have a minimum of 25.5% postconsumer recycled content, and 6.8% pre-consumer.

**REFERENCES**

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or **USGme.com**

**Disclaimer:**

Information contained in this document is subject to change without prior notice due to our ongoing product development. We recommend referring to the website **usgme.com** for the most up-to-date and accurate product information.

©2024 Factory of USG Middle East LTD. Co. All rights reserved.