


# DRYWALL CONTROL JOINT

<b>CJA</b>	<b>75</b>
Control Joint	A: Aluminium S: Steel
Thickness	

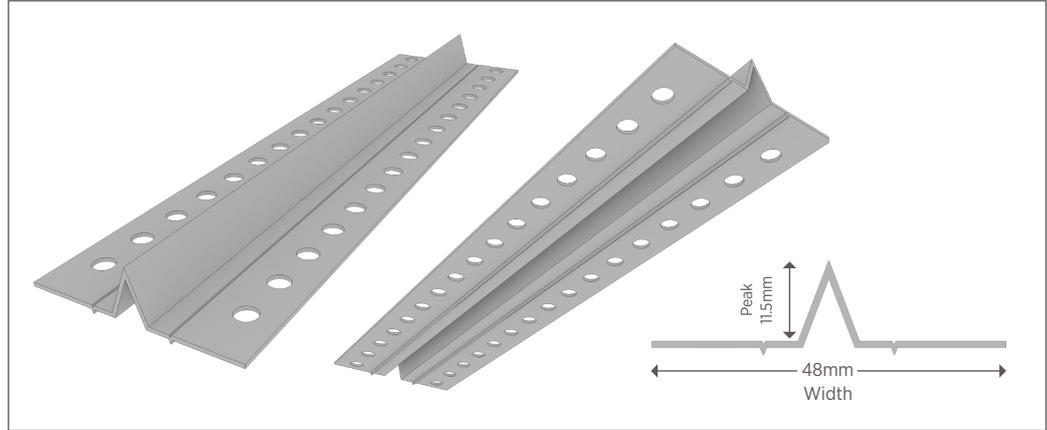

**DESCRIPTION**


Allowing for expansion in both walls and ceilings, control joint has been designed for movement of up to 6m in each direction.

**DIMENSIONS**

**Length:** 3000mm  
**Dimensions:** 11.5x48mm  
**Thickness:**  
 • Steel: 0.45mm  
 • Aluminium: 0.75mm  
**Perforations:** Two standard patterns

**PERFORATIONS**

Standard - 2 Patterns



**RAW MATERIALS**

- Steel: Galvanized G40-G90
- Aluminium: Alloy 6063

**MATERIALS GRADE**

- Steel: Yield stress, Fy 33 ksi Ultimate
- Aluminium: Yield stress, Fy 28 ksi Ultimate

**GREEN BENEFITS**

- LEED Credit MR 2 – USG products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.
- LEED Credit MR 4 – USG’s steel products have a minimum of 25.5% post-consumer recycled content, and 6.8% pre-consumer.

**REFERENCES**

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or [USGme.com](http://USGme.com)

**Disclaimer:**  
 Information contained in this document is subject to change without prior notice due to our ongoing product development. We recommend referring to the website [usgme.com](http://usgme.com) for the most up-to-date and accurate product information.

©2024 Factory of USG Middle East LTD. Co. All rights reserved.

