


DRYWALL FIXING BRACKET

FB201730-090

Fixing Bracket	Width	Height	Length	Thickness
-------------------	-------	--------	--------	-----------

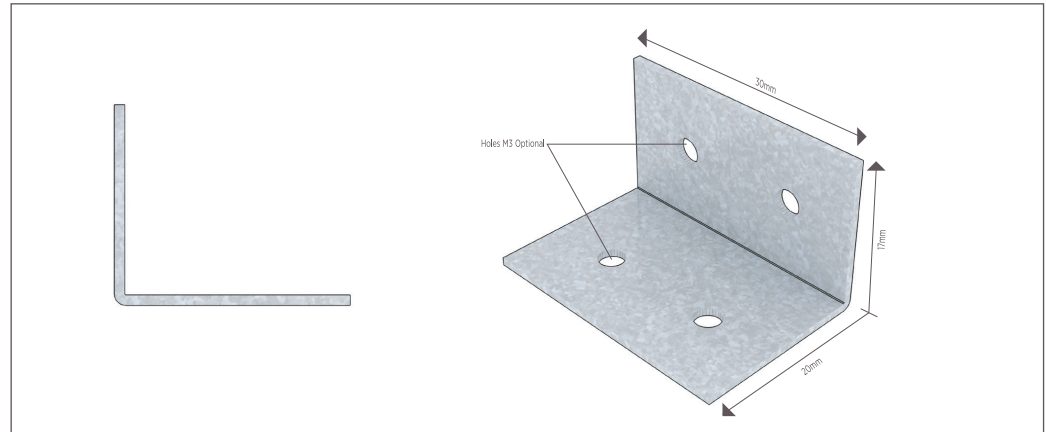

DESCRIPTION

Used in wall assemblies allowing for supporting a vertical load or providing lateral bracing CRC connections and floor joist hangers.

DIMENSIONS

Thickness Range: 0.9, 1.20 and 1.5mm

Dimension: 17 x 20 x 30mm

RAW MATERIALS

HDG Galvanized G40-G90 Zinc coating weight

STEEL GRADE

Yield stress, Fy 33 ksi Ultimate

ASTM & CODE STANDARDS

- USG Fixing Bracket is produced to meet ASTM C645 and C955
- Galvanized sheet steel meets requirements of ASTM A-653
- For installation & storage information refer to ASTM C1007 & C754

GREEN BENEFITS AND RECYCLED CONTENT

- LEED Credit MR 2 – USG products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.
- LEED Credit MR 4 – USG's steel products have a minimum of 25.5% postconsumer recycled content, and 6.8% pre-consumer.

REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or [USGme.com](https://www.usgme.com)

Disclaimer:

Information contained in this document is subject to change without prior notice due to our ongoing product development. We recommend referring to the website [usgme.com](https://www.usgme.com) for the most up-to-date and accurate product information.

©2024 Factory of USG
Middle East LTD. Co.
All rights reserved.