



# USG MIDDLE EAST DRYWALL J -TRIMS

## FEATURES & BENEFITS


### Metal J Trims

Protect Drywall edges around door and window openings and provide a smooth trim line at intersections.

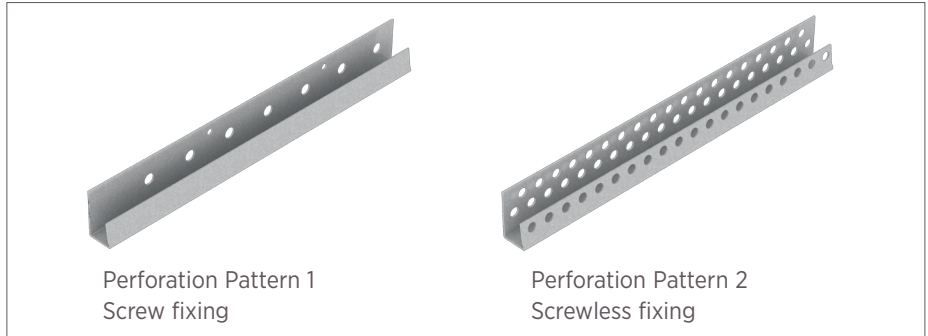

#### JT1313-045

Designed for 12.5 and 12.7 Boards



#### JT1316-045

Designed for 15, 15.9 and 16mm Boards

### DIMENSIONS

**Length:** 3000 mm  
**Dimensions:** 13x14x25 mm or 13x17x25 mm  
**Thickness:** 0.45 mm  
**Perforations:** Standard - 2 Patterns

### RAW MATERIALS

Galvanized steel G90

### STEEL GRADE

Yield stress,  $F_y$  33 ksi Ultimate

### ASTM & CODE STANDARDS

- Metal J-trims are produced to meet or exceed ASTM C645 and C955.
- Galvanized sheet steel meets or exceeds requirements of ASTM A-653.
- For installation & storage information refer to ASTM C1007 & C754.

### GREEN BENEFITS

LEED Credit MR 2 – USG products are manufactured from cold formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.  
 LEED Credit MR 4 – USG steel products have a minimum of 25.5% post-consumer recycled content, and 6.8% pre-consumer.

### REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or [USGme.com](http://USGme.com)

#### Disclaimer:

Information contained in this document is subject to change without prior notice due to our ongoing product development. We recommend referring to the website [usgme.com](http://usgme.com) for the most up-to-date and accurate product information.

©2023 Factory of USG Middle East LTD. Co. All rights reserved.