
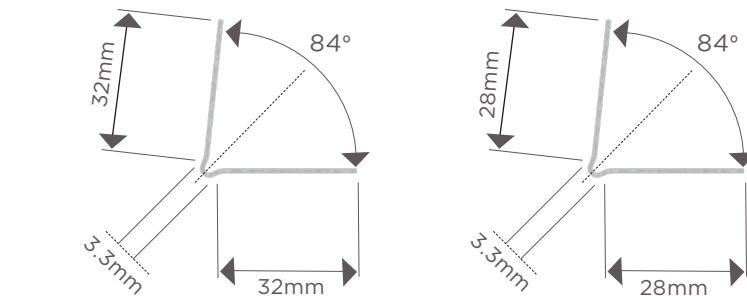


USG MIDDLE EAST DRYWALL L-CORNERS BEADS

FEATURES & BENEFITS

Metal L Corner Beads

Used to reinforce Drywall and deliver a monolithic and seamless finish along its corners and intersections.

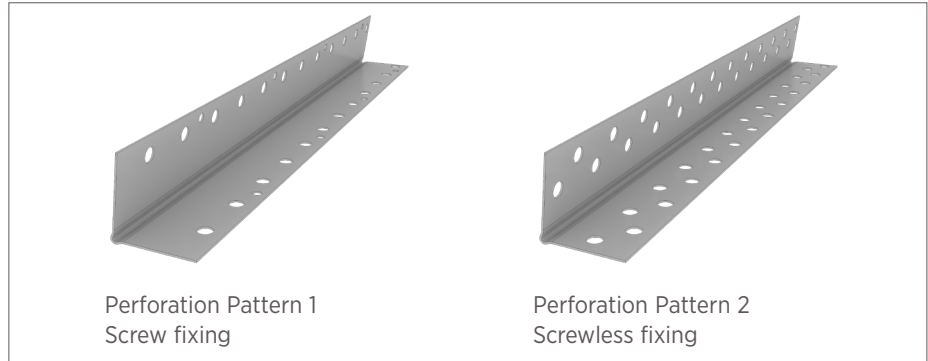

DIMENSIONS

Length: 3000 mm
Width: 32x32 mm or 28x28 mm
Thickness: 0.45 mm
Perforations: Standard - 2 Patterns

MATERIAL PROPERTIES

Yield stress, Fy 33 ksi Ultimate, with G90 Zinc coating

ASTM & CODE STANDARDS

- Steel Corner Beads are produced to meet or exceed ASTM C645 and C955
- Galvanized sheet steel meets or exceeds requirements of ASTM A-653
- For installation & storage information refer to ASTM C1047 & C754

GREEN BENEFITS

LEED Credit MR 2 – USG products are manufactured from cold formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.
LEED Credit MR 4 – USG steel products have a minimum of 25.5% post-consumer recycled content, and 6.8% pre-consumer.

REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or **USGme.com**

Disclaimer:

Information contained in this document is subject to change without prior notice due to our ongoing product development. We recommend referring to the website **usgme.com** for the most up-to-date and accurate product information.

©2023 Factory of USG
Middle East LTD. Co.
All rights reserved.