


PRIMARY CHANNEL C-BRACKET

PCB-TR

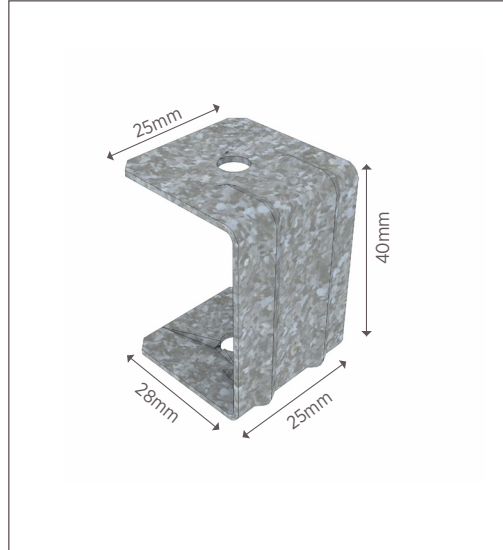

DESCRIPTION

C-Brackets are steel accessories used to fasten the primary channel into the threaded rod (M6) suspension hanger that is anchored in the ceiling soffit above.

DIMENSIONS

Dimensions: 28 x 40 x 28 x 25mm
Thickness: 0.50mm

RAW MATERIALS

- Galvanized steel G40-G90, Yield stress, Fy 33 ksi Ultimate

ASTM & CODE STANDARDS

- Primary Channel C-Brackets are produced to meet ASTM C635, C645 and C977
- Galvanized sheet steel meets requirements of ASTM A-653

GREEN BENEFITS AND RECYCLED CONTENT

- LEED Credit MR 2 – USG products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.
- LEED Credit MR 4 – USG's steel products have a minimum of 25.5% post-consumer recycled content, and 6.8% pre-consumer.

REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or [USGme.com](https://www.usgme.com)

Disclaimer:

Information contained in this document is subject to change without prior notice due to our ongoing product development. We recommend referring to the website [usgme.com](https://www.usgme.com) for the most up-to-date and accurate product information.

©2024 Factory of USG
Middle East LTD. Co.
All rights reserved.