


SELF TAPPING SCREW

USDBH4225

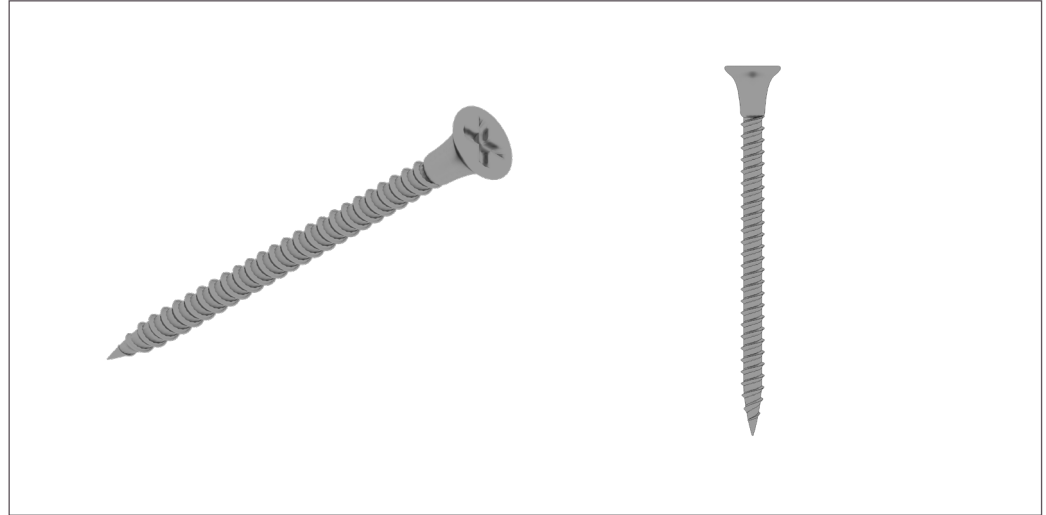

DESCRIPTION

Plasterboard screws are fasteners for single-layer and multi-layer drywall planking, insulation and accessory mountings on steel structures made of light gauge steel up to 0.6mm thickness. Up to 75mm length.

PRODUCT DATA

Material: hardened steel

Length: 25, 32, 38, 50, 65 and 75mm

Finish: Black Phosphate

Quantity per box:

Length	25mm	32mm	38mm	50mm	65mm	75mm
Quantity (pc)	1000	1000	1000	500	500	250
Item Code (Head 4.2)	USDBH4225	USDBH4232	USDBH4238	USDBH4250	USDBH4265	USDBH4275
Item Code (Head 3.9)	USDBH3925	USDBH3932		USDBH3950		

SPECIAL CHARACTERISTICS

- Screw self tapping
- Philips head recess
- Special drill point

RUST PROTECTION

- Anti corrosion treatment by zinc coating
- Available in 24h salt spray test

STANDARDS

These screws comply with:

- ASTM C 1002 – 98 standard specification for steel drill screws for application of gypsum panel products or metal plaster bases.

APPLICATION

In a dry wall system, plasterboard screws are used for rapid attachment of facing materials to steel framing by a power screw driver. They are used in all types of drywalls partitions, liner walls & ceilings.

REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or **USGme.com**

Disclaimer:

Information contained in this document is subject to change without prior notice due to our ongoing product development. We recommend referring to the website **usgme.com** for the most up-to-date and accurate product information.

©2024 Factory of USG Middle East LTD. Co. All rights reserved.