


# SHADOWLINE Z - STOPPAGE ANGLE

SA201515-050

Stoppage Angle	Height	Width	Lip Height	Thickness
-------------------	--------	-------	---------------	-----------

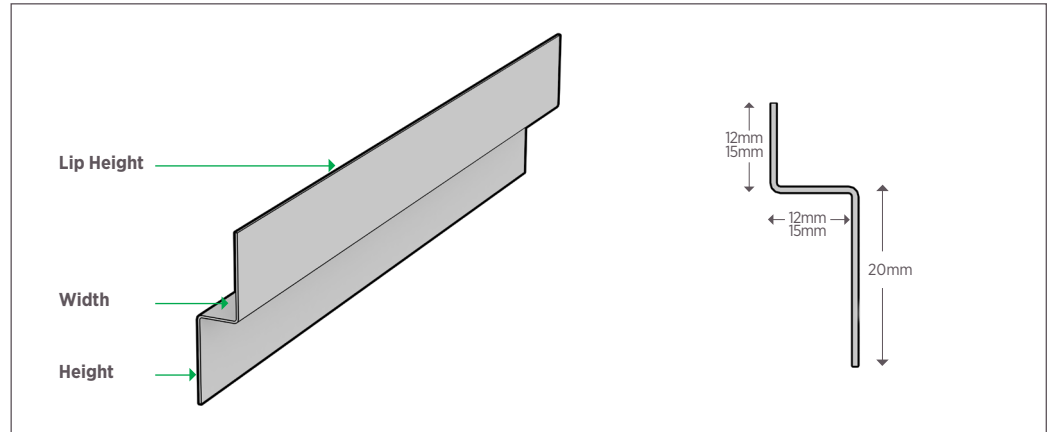

## DESCRIPTION

Create a reveal edge look at ceiling perimeter installations whilst helping to hide imperfections in the abutting walls. The Z-Stoppage angle considered as part of the grid and suspension system attached to the wall.

## PRODUCT DATA

**Height:** 20mm  
**Width:** 12mm, 15mm  
**Lip Height:** 12mm, 15mm  
**Thickness:** From 0.45mm to 0.90mm  
**Length:** Standard 3000mm-3600mm could be made as per customer requirements  
**Perforation:** Plain and Perforated

## RAW MATERIALS

- Galvanized steel G40-G90
- Pre-painted Steel in 0.45 Base Material Thickness

## STEEL GRADE

Yield stress, Fy 33 ksi Ultimate

## ASTM & CODE STANDARDS

- Shadow Angles are produced to meet ASTM C645, C635 and C955
- Galvanized sheet steel meets requirements of ASTM A-653
- For installation & storage information refer to ASTM C1007 & C754

## GREEN BENEFITS

- LEED Credit MR 2 – USG products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.
- LEED Credit MR 4 – USG's steel products have a minimum of 25.5% post-consumer recycled content, and 6.8% pre-consumer.

## REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or [USGme.com](https://www.usgme.com)

### Disclaimer:

Information contained in this document is subject to change without prior notice due to our ongoing product development. We recommend referring to the website [usgme.com](https://www.usgme.com) for the most up-to-date and accurate product information.

©2024 Factory of USG  
Middle East LTD. Co.  
All rights reserved.