





# WIRE CONNECTING CLIP (WCC)

#### **DESCRIPTION**

The 2.5mm wire connecting clips (WCC) are widely used to fasten the furring channels to the primary channels of 38mm width. WCC are mainly used in the Drywall ceiling and the Clip-in ceiling applications.



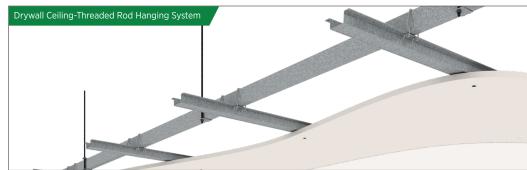


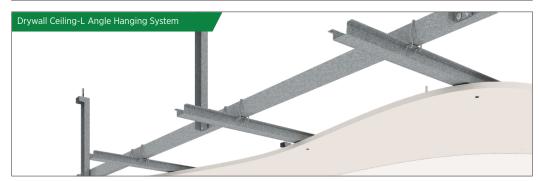








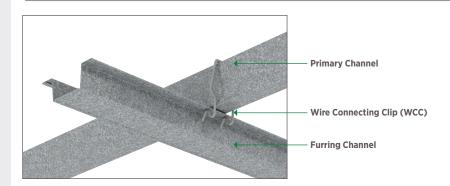

### SECTION DETAILS

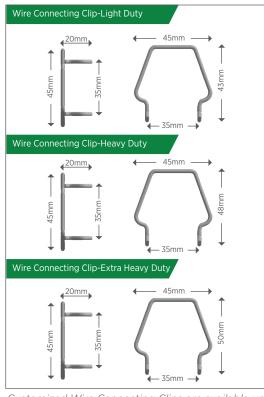

Wire connecting Clip-Light duty is primarily used in 0.45-0.6mm framing systems

Wire connecting Clip-Heavy duty is primarily used in 0.7-0.9mm framing systems

Wire connecting Clip-Extra Heavy duty is primarily used in 1.2-1.5mm framing systems

Customized Wire Connecting Clips are available upon request

#### **RAW MATERIALS**

- Galvanized steel G90 JIS G 3506 SWRH (Spring Effect)
- Surface: Zinc galvanized

#### **ASTM & CODE STANDARDS**

- Wire Connecting Clips are produced to meet ASTM C645 and C977
- Galvanized sheet steel meets requirements of ASTM A-653
- $\bullet$  For installation & storage information refer to ASTM C1007 & C754

## GREEN BENEFITS AND RECYCLED CONTENT

- LEED Credit MR 2 USG products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.
- LEED Credit MR 4 USG's steel products have a minimum of 25.5% post-consumer recycled content, and 6.8% pre-consumer.

Disclaimer: REFERENCES

Information contained in this document is subject to change without prior notice due to our ongoing product development. We recommend referring to the website **usgme.com** for the most up-to-date and accurate product information.

©2024 Factory of USG Middle East LTD. Co. All rights reserved.



For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or **USGme.com**