

SKYROCK® FLEXIBLE CORNER TAPE



DESCRIPTION


FEATURES & BENEFITS

For drywall applications—creates strong corners on any inside or outside corner, including vaulted and coffered ceilings. Installs quickly and easily with joint compound to eliminate nail pops. Combines the strength of steel with the superior bond of compound to paper using two rust resistant 10 mm wide galvanized steel strips. Unique nose coating minimizes scuffing and fuzzing when finishing and sanding.

- Tape-on inside and outside corners-for any corner.
- Resistant to edge cracking and chipping.
- Low profile for easier finishing.

APPLICATION

Skyrock® flexible corner tape can be installed 38% faster than traditional metal bead. The executed projects with Skyrock® flexible corner tape had revealed that the half of the project with paper faced metal bead required less joint compound, and the crew increased their productivity, which saved a significant amount in labor costs. Moreover, because Skyrock® flexible corner tape does not require nails or screws; there is no risk of corner cracks. That means with Skyrock® flexible corner tape Drywall you not only saved time, but you also can save money on both installation and callbacks.

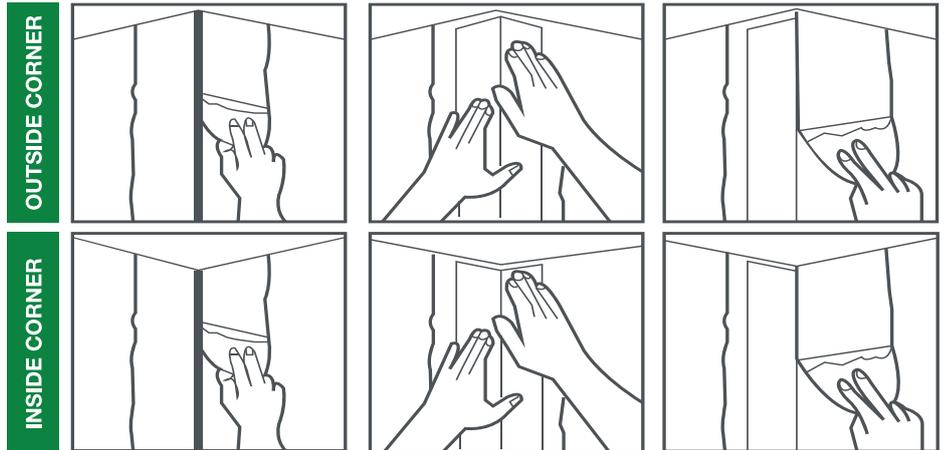

1. Apply over dry surface only. Maintain minimum air, joint compound and surface temperature of 15°C until joint compound is completely dry. Using a 150 mm knife, apply joint compound to inside or outside corner of drywall.

2. Fold tape at center. With the metal side of tape facing drywall surface, embed tape firmly in compound. Remove extra compound with taping knife. Allow to dry.

3. For inside corners apply compound to one side, let dry, then apply compound to the other side. Apply another coat of compound, feathering beyond prior coat, let dry. If needed smooth with wet sponge. Sand the surface after compound dries, sand with a wet sponge to eliminate dust or use 150-grit or finer sandpaper or 220-grit or finer abrasive mesh cloth. Avoid scuffing panel paper.

PRODUCT DATA

Size: 50mm x 30m
Coverage: Approx. 30lm/12m² gypsum panels
Number of roll per carton: 10 rolls

Disclaimer:
 Information contained in this document is subject to change without prior notice due to our ongoing product development. We recommend referring to the website usgme.com for the most up-to-date and accurate product information.

©2024 Factory of USG Middle East LTD. Co. All rights reserved.

