


DRYWALL FLAT STRIP (WALL BRACING)

FS58-060		
Flat Strip	Width	Thickness

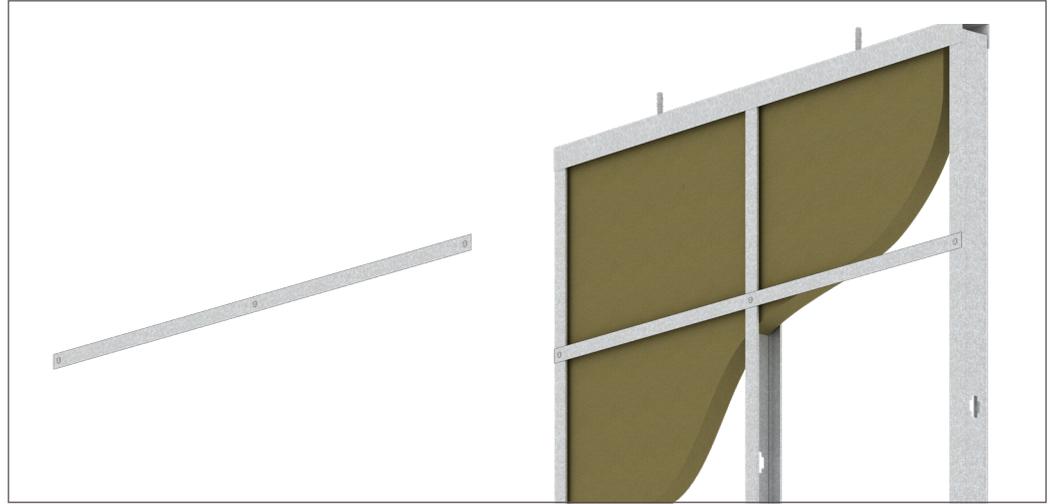

DESCRIPTION

- Used in framing applications as wall bracing which provides significant resistance to lateral loads.
- Used as X - Bracing in wall assembly to resist racking and comply with seismic requirements.
- System applies for walls height above 3.5m.

DIMENSIONS

Thickness Range: 0.60, 0.70, 0.90, 1.2 and 1.5 mm
Strip width: 58 mm
Length: Coming in roll approx. 100kg, Length could be cut as per requirements.

RAW MATERIALS

HDG Galvanized G40-G90 Zinc coating

STEEL GRADE

Yield stress, Fy 33 ksi Ultimate

ASTM & CODE STANDARDS

- Drywall flat strip (wall bracing) is produced to meet ASTM C645 and C955
- Galvanized sheet steel meets requirements of ASTM A-653
- For installation & storage information refer to ASTM C1007 & C754

GREEN BENEFITS

- LEED Credit MR 2 - USG products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.
- LEED Credit MR 4 - USG's steel products have a minimum of 25.5% post-consumer recycled content, and 6.8% pre-consumer.

REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or USGme.com

Disclaimer:
 Information contained in this document is subject to change without prior notice due to our ongoing product development. We recommend referring to the website usgme.com for the most up-to-date and accurate product information.

©2024 Factory of USG Middle East LTD. Co. All rights reserved.