


HAMMER FIX

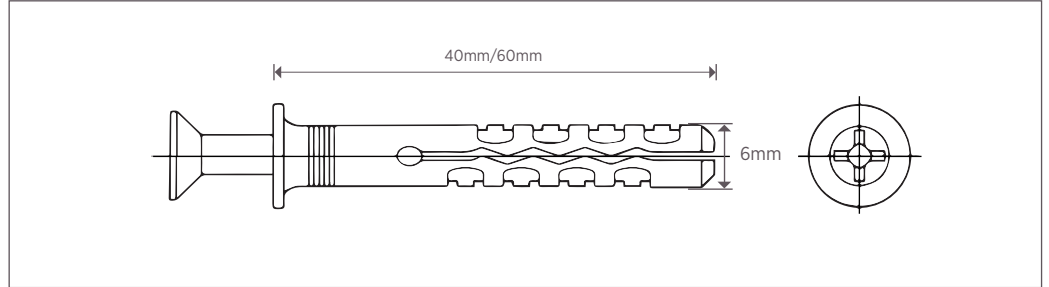

DESCRIPTION

Hammer Fix is a reliable solution for the metal framing fastening needs. Crafted with a zinc-coated, corrosion-resistant nail, securely engaged in a sturdy nylon plug, this fixing tool is designed to effortlessly secure metal framing for drywall partitions onto masonry surfaces. Offering a quick and efficient fixing option, the Hammer Fix is our easy solution for various applications where fire resistance requirements are not essential as the Hammer Fix is not suitable for fixing suspension supports or fire-rated solutions.

- Pre-assembled for easy handling
- Special thread lock design that prevents pre-expansion during transit
- Quick and fast installation by direct hammering into substrate
- Optional screw fixing and/or removal to allow easy dismantling where required

PRODUCT DATA

Materials

Carbon and Alloy Steels: Bright Zinc Plated 5 microns
Stainless Steels: Grades A2, A4 according to ISO 3506

Property	TNX6X40	TNX6X60
Length	40mm	60mm
Tensile Resistance		
Concrete C 20/25	0.25kN	0.25kN
Solid Masonry	0.2kN	0.2kN
AAC	0.04kN	0.04kN
Shear Resistance		
Concrete C 20/25	0.25kN	0.25kN
Solid Masonry	0.2kN	0.2kN
AAC	0.06kN	0.06kN

Disclaimer:

Information contained in this document is subject to change without prior notice due to our ongoing product development. We recommend referring to the website usgme.com for the most up-to-date and accurate product information.

©2024 Factory of USG Middle East LTD. Co. All rights reserved.