

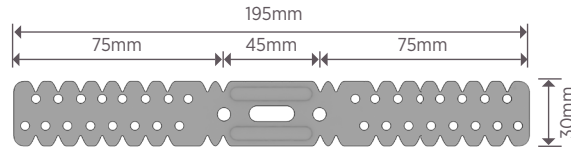


ADJUSTABLE WALL LINER BRACKET

Short Bracket



Long Bracket

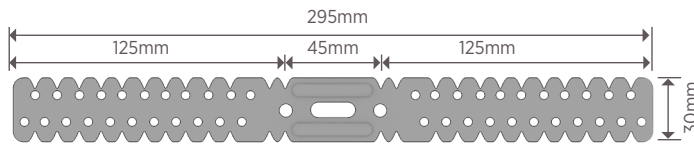

DESCRIPTION

The Adjustable Wall Liner Bracket is specifically designed for close-fit applications in wall lining installations. It is intended to be directly fixed to the main substrate, providing a secure attachment for the Universal C Stud. This combined system of the Adjustable Wall Liner Bracket and the Universal C Stud ensures a seamless wall lining installation that effectively conceals any imperfections in the main substrate.

The adjustability of the Wall Liner Bracket allows for installation in main substrate cavities ranging from 25mm up to 125mm. This feature makes it suitable for refurbishing existing walls that require improved acoustic performance, while also accommodating MEP conduits and other services within the cavity. Additionally, the use of the adjustable bracket helps to control thermal bridging in the insulation layer, leading to optimal energy efficiency.

Overall, the Adjustable Wall Liner Bracket offers a versatile and efficient solution for achieving high-quality wall lining installations while addressing the specific requirements of each project.

PRODUCT CATEGORIES

Serrated Bracket:

Bracket: Width x Length - Thickness

- Short Bracket: 30 x 195 - 0.9mm thick
- Long bracket: 30 x 295 - 1.0mm thick

Item codification:

- Short Bracket: 60B17997
- Long bracket: AH186-GL9P

RAW MATERIALS

- Galvanized steel Z140

REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or **USGme.com**

Disclaimer:

Information contained in this document is subject to change without prior notice due to our ongoing product development. We recommend referring to the website **usgme.com** for the most up-to-date and accurate product information.

©2024 Factory of USG
Middle East LTD. Co.
All rights reserved.